

**SIB-TEC LF** Cable Gland + locknuts  
*Presse étoupe SIB-TEC LF + contre-écrous*BRASS  
LEAD  
FREE

UNIVERSAL

FOR  
ROUND  
CABLESWITH  
LAMELLAS**IP PROTECTION :**

IP 66/68 – NEMA 4X

**OPERATING****TEMPERATURE :**

-40 °C / +100 °C

**SPECIAL FEATURES :**

- Short & long thread
- Reduced sealing available (RED\*)
- O-ring included
- Available in EMC version (on request)
- For Single Wire braid

**MATERIAL :**

- Nickel plated Lead Free : CW 724R / CW 710L
- Sealing : EPDM
- O-ring : nitrile
- Insert PA6

**THREAD :**

Metric, PG, NPT

**CERTIFICATION :**

IEC 62 444

**ACCESSORIES****AVAILABLE :**

See page accessories

**INDICE DE PROTECTION :**

IP 66/68 – NEMA 4X

**PLAGE DE****TEMPÉRATURE :**

-40 °C / +100 °C

**AVANTAGES****TECHNIQUES :**

- Filetage court & long
- Garnitures réductrices disponibles (RED\*)
- Joint inclus
- Disponible en version CEM (sur demande)
- Pour câble à tresse

**MATÉRIEL :**

- Laiton nickelé sans plomb : CW 724R / CW 710L
- Garniture : EPDM
- Joint torique : nitrile
- Insert PA6

**FILETAGE :**

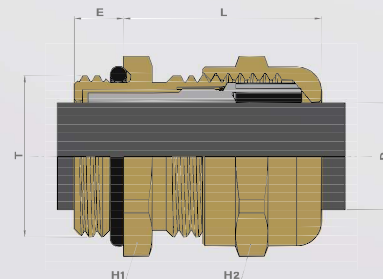
Métrique, PG, NPT

**CERTIFICATION :**

IEC 62 444

**ACCESSOIRES****DISPONIBLES :**

Voir page des accessoires

**SIB-TEC LF**

	Thread (T)	Part Number	Overall cable diameter (D)		H1	H2	E	L	Packing
			Min	Max					
Metric Short	12	110020501	2,5	6,5	14,0	14,0	5,0	20,0	50
	16	110020502	4,0	9,5	17,0	17,0	5,0	23,0	50
	20	110020503	7,0	13,0	22,0	22,0	6,0	26,0	50
	25	110020504	8,0	16,0	27,0	27,0	7,0	28,0	25
	32	110020505	11,0	21,0	34,0	34,0	8,0	30,0	20
	40	110020506	15,0	27,0	42,0	42,0	8,0	33,0	20
	50	110020507	22,0	35,0	55,0	55,0	9,0	37,0	10
	63	110020508	35,0	48,0	65,0	65,0	10,0	44,0	5
Metric Short RED*	12	110020509	1,5	5,0	14,0	14,0	5,0	20,0	50
	16	110020510	2,5	7,0	17,0	17,0	5,0	23,0	50
	20	110020511	4,0	10,0	22,0	22,0	6,0	26,0	50
	25	110020512	5,0	13,0	27,0	27,0	7,0	28,0	25
	32	110020513	7,0	17,0	34,0	34,0	8,0	30,0	20
	40	110020514	10,0	22,0	42,0	42,0	8,0	33,0	20
	50	110020515	17,0	29,0	55,0	55,0	9,0	37,0	10
	63	110020516	28,0	40,0	65,0	65,0	10,0	44,0	5

**LOCKNUTS LF**

	Thread (T)	Part Number	H	E	Packing
Metric	12	120010038	15,0	3,0	50
	16	120010039	20,0	3,0	50
	20	120010040	24,0	3,5	50
	25	120010041	30,0	3,5	25
	32	120010042	35,0	4,5	20
	40	120010043	45,0	4,5	20
	50	120010044	55,0	5,5	10
	63	120010045	70,0	6,0	5

\*Reduced sealing / Garniture réductrice

Dimension in millimeters