

**SIB-TEC LF** Cable Gland + locknuts  
*Presse étoupe SIB-TEC LF + contre-écrous***IP PROTECTION :**

IP 66/68 – NEMA 4X

**OPERATING****TEMPERATURE :**

-40 °C / +100 °C

**SPECIAL FEATURES :**

- Short & long thread
- Reduced sealing available (RED\*)
- O-ring included
- Available in EMC version (on request)
- For Single Wire braid

**MATERIAL :**

- Nickel plated Lead Free : CW 724R / CW 710L
- Sealing : EPDM
- O-ring : nitrile
- Insert PA6

**THREAD :**

Metric, PG, NPT

**CERTIFICATION :**

IEC 62 444

**ACCESSORIES****AVAILABLE :**

See page accessories

**INDICE DE PROTECTION :**

IP 66/68 – NEMA 4X

**PLAGE DE****TEMPÉRATURE :**

-40 °C / +100 °C

**AVANTAGES****TECHNIQUES :**

- Filetage court & long
- Garnitures réductrices disponibles (RED\*)
- Joint inclus
- Disponible en version CEM (sur demande)
- Pour câble à tresse

**MATÉRIEL :**

- Laiton nickelé sans plomb : CW 724R / CW 710L
- Garniture : EPDM
- Joint torique : nitrile
- Insert PA6

**FILETAGE :**

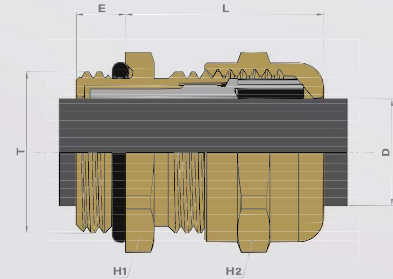
Métrique, PG, NPT

**CERTIFICATION :**

IEC 62 444

**ACCESSOIRES****DISPONIBLES :**

Voir page des accessoires

**SIB-TEC LF**

|                   | Thread (T) | Part Number | Overall cable diameter (D) |      | H1   | H2   | E    | L    | Packing |
|-------------------|------------|-------------|----------------------------|------|------|------|------|------|---------|
|                   |            |             | Min                        | Max  |      |      |      |      |         |
| Metric Short      | 12         | 110020501   | 2,5                        | 6,5  | 14,0 | 14,0 | 5,0  | 20,0 | 50      |
|                   | 16         | 110020502   | 4,0                        | 9,5  | 17,0 | 17,0 | 5,0  | 23,0 | 50      |
|                   | 20         | 110020503   | 7,0                        | 13,0 | 22,0 | 22,0 | 6,0  | 26,0 | 50      |
|                   | 25         | 110020504   | 8,0                        | 16,0 | 27,0 | 27,0 | 7,0  | 28,0 | 25      |
|                   | 32         | 110020505   | 11,0                       | 21,0 | 34,0 | 34,0 | 8,0  | 30,0 | 20      |
|                   | 40         | 110020506   | 15,0                       | 27,0 | 42,0 | 42,0 | 8,0  | 33,0 | 20      |
|                   | 50         | 110020507   | 22,0                       | 35,0 | 55,0 | 55,0 | 9,0  | 37,0 | 10      |
|                   | 63         | 110020508   | 35,0                       | 48,0 | 65,0 | 65,0 | 10,0 | 44,0 | 5       |
| Metric Short RED* | 12         | 110020509   | 1,5                        | 5,0  | 14,0 | 14,0 | 5,0  | 20,0 | 50      |
|                   | 16         | 110020510   | 2,5                        | 7,0  | 17,0 | 17,0 | 5,0  | 23,0 | 50      |
|                   | 20         | 110020511   | 4,0                        | 10,0 | 22,0 | 22,0 | 6,0  | 26,0 | 50      |
|                   | 25         | 110020512   | 5,0                        | 13,0 | 27,0 | 27,0 | 7,0  | 28,0 | 25      |
|                   | 32         | 110020513   | 7,0                        | 17,0 | 34,0 | 34,0 | 8,0  | 30,0 | 20      |
|                   | 40         | 110020514   | 10,0                       | 22,0 | 42,0 | 42,0 | 8,0  | 33,0 | 20      |
|                   | 50         | 110020515   | 17,0                       | 29,0 | 55,0 | 55,0 | 9,0  | 37,0 | 10      |
|                   | 63         | 110020516   | 28,0                       | 40,0 | 65,0 | 65,0 | 10,0 | 44,0 | 5       |

**LOCKNUTS LF**

|        | Thread (T) | Part Number | H    | E   | Packing |
|--------|------------|-------------|------|-----|---------|
| Metric | 12         | 120010038   | 15,0 | 3,0 | 50      |
|        | 16         | 120010039   | 20,0 | 3,0 | 50      |
|        | 20         | 120010040   | 24,0 | 3,5 | 50      |
|        | 25         | 120010041   | 30,0 | 3,5 | 25      |
|        | 32         | 120010042   | 35,0 | 4,5 | 20      |
|        | 40         | 120010043   | 45,0 | 4,5 | 20      |
|        | 50         | 120010044   | 55,0 | 5,5 | 10      |
|        | 63         | 120010045   | 70,0 | 6,0 | 5       |