

**SIB-TEC LF** Cable Gland + locknuts
*Presse étoupe SIB-TEC LF + contre-écrous*BRASS
LEAD
FREE

UNIVERSAL

FOR
ROUND
CABLESWITH
LAMELLAS**IP PROTECTION :**

IP 66/68 – NEMA 4X

OPERATING**TEMPERATURE :**

-40 °C / +100 °C

SPECIAL FEATURES :

- Short & long thread
- Reduced sealing available (RED*)
- O-ring included
- Available in EMC version (on request)
- For Single Wire braid



SWB

MATERIAL :

- Nickel plated Lead Free : CW 724R / CW 710L
- Sealing : EPDM
- O-ring : nitrile
- Insert PA6

THREAD :

Metric, PG, NPT

CERTIFICATION :

IEC 62 444

ACCESSORIES**AVAILABLE :**

See page accessories

INDICE DE PROTECTION :

IP 66/68 – NEMA 4X

PLAGE DE**TEMPÉRATURE :**

-40 °C / +100 °C

AVANTAGES**TECHNIQUES :**

- Filetage court & long
- Garnitures réductrices disponibles (RED*)
- Joint inclus
- Disponible en version CEM (sur demande)
- Pour câble à tresse



SWB

MATÉRIEL :

- Laiton nickelé sans plomb : CW 724R / CW 710L
- Garniture : EPDM
- Joint torique : nitrile
- Insert PA6

FILETAGE :

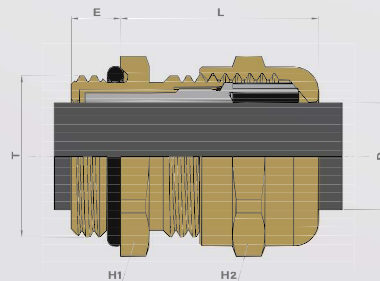
Métrique, PG, NPT

CERTIFICATION :

IEC 62 444

ACCESSOIRES**DISPONIBLES :**

Voir page des accessoires

**SIB-TEC LF**

| | Thread (T) | Part Number | Overall cable diameter (D) | | H1 | H2 | E | L | Packing |
|-------------------|------------|-------------|----------------------------|------|------|------|------|------|---------|
| | | | Min | Max | | | | | |
| Metric Short | 12 | 110020501 | 2,5 | 6,5 | 14,0 | 14,0 | 5,0 | 20,0 | 50 |
| | 16 | 110020502 | 4,0 | 9,5 | 17,0 | 17,0 | 5,0 | 23,0 | 50 |
| | 20 | 110020503 | 7,0 | 13,0 | 22,0 | 22,0 | 6,0 | 26,0 | 50 |
| | 25 | 110020504 | 8,0 | 16,0 | 27,0 | 27,0 | 7,0 | 28,0 | 25 |
| | 32 | 110020505 | 11,0 | 21,0 | 34,0 | 34,0 | 8,0 | 30,0 | 20 |
| | 40 | 110020506 | 15,0 | 27,0 | 42,0 | 42,0 | 8,0 | 33,0 | 20 |
| | 50 | 110020507 | 22,0 | 35,0 | 55,0 | 55,0 | 9,0 | 37,0 | 10 |
| | 63 | 110020508 | 35,0 | 48,0 | 65,0 | 65,0 | 10,0 | 44,0 | 5 |
| Metric Short RED* | 12 | 110020509 | 1,5 | 5,0 | 14,0 | 14,0 | 5,0 | 20,0 | 50 |
| | 16 | 110020510 | 2,5 | 7,0 | 17,0 | 17,0 | 5,0 | 23,0 | 50 |
| | 20 | 110020511 | 4,0 | 10,0 | 22,0 | 22,0 | 6,0 | 26,0 | 50 |
| | 25 | 110020512 | 5,0 | 13,0 | 27,0 | 27,0 | 7,0 | 28,0 | 25 |
| | 32 | 110020513 | 7,0 | 17,0 | 34,0 | 34,0 | 8,0 | 30,0 | 20 |
| | 40 | 110020514 | 10,0 | 22,0 | 42,0 | 42,0 | 8,0 | 33,0 | 20 |
| | 50 | 110020515 | 17,0 | 29,0 | 55,0 | 55,0 | 9,0 | 37,0 | 10 |
| | 63 | 110020516 | 28,0 | 40,0 | 65,0 | 65,0 | 10,0 | 44,0 | 5 |

**LOCKNUTS LF**

| | Thread (T) | Part Number | H | E | Packing |
|--------|------------|-------------|------|-----|---------|
| Metric | 12 | 120010038 | 15,0 | 3,0 | 50 |
| | 16 | 120010039 | 20,0 | 3,0 | 50 |
| | 20 | 120010040 | 24,0 | 3,5 | 50 |
| | 25 | 120010041 | 30,0 | 3,5 | 25 |
| | 32 | 120010042 | 35,0 | 4,5 | 20 |
| | 40 | 120010043 | 45,0 | 4,5 | 20 |
| | 50 | 120010044 | 55,0 | 5,5 | 10 |
| | 63 | 120010045 | 70,0 | 6,0 | 5 |

*Reduced sealing / Garniture réductrice