SIB-TEC LF Cable Gland + locknuts
*Presse étoupe **SIB-TEC LF** + contre-écrous*

BRASS LEAD FREE | UNIVERSAL | FOR ROUND CABLES | WITH LAMELLAS

IP PROTECTION :
IP 66/68 – NEMA 4X

OPERATING TEMPERATURE :
-40 °C/ +100 °C

SPECIAL FEATURES :
- Short & long thread
- Reduced sealing available (RED*)
- O-ring included
- Available in EMC version (on request)
- For Single Wire braid

SWB

MATERIAL :
- Nickel plated Lead Free : CW 724R / CW 710L
- Sealing : EPDM
- O-ring : nitrile
- Insert PA6

THREAD :
Metric, PG, NPT

CERTIFICATION :
IEC 62 444

ACCESSORIES AVAILABLE :
See page accessories

INDICE DE PROTECTION :
IP 66/68 – NEMA 4X

PLAGE DE TEMPÉRATURE :
-40 °C / +100 °C

AVANTAGES TECHNIQUES :
- Filetage court & long
- Garnitures réductrices disponibles (RED*)
- Joint inclus
- Disponible en version CEM (sur demande)
- Pour câble à tresse

SWB

MATÉRIEL :
- Laiton nickelé sans plomb : CW 724R / CW 710L
- Garniture : EPDM
- Joint torique : nitrile
- Insert PA6

FILETAGE :
Métrique, PG, NPT

CERTIFICATION :
IEC 62 444

ACCESSOIRES DISPONIBLES :
Voir page des accessoires

NEMA 4X

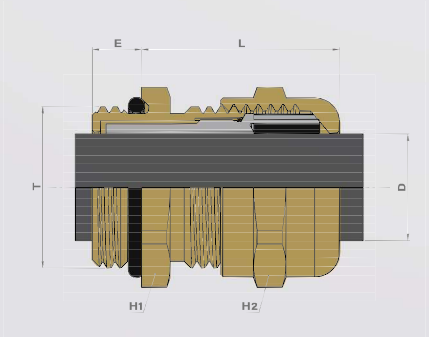

SIB-TEC LF

	Thread (T)	Part Number	Overall cable diameter (D) Min	Overall cable diameter (D) Max	H1	H2	E	L	Packing
Metric Short	12	110020501	2,5	6,5	14,0	14,0	5,0	20,0	50
	16	110020502	4,0	9,5	17,0	17,0	5,0	23,0	50
	20	110020503	7,0	13,0	22,0	22,0	6,0	26,0	50
	25	110020504	8,0	16,0	27,0	27,0	7,0	28,0	25
	32	110020505	11,0	21,0	34,0	34,0	8,0	30,0	20
	40	110020506	15,0	27,0	42,0	42,0	8,0	33,0	20
	50	110020507	22,0	35,0	55,0	55,0	9,0	37,0	10
	63	110020508	35,0	48,0	65,0	65,0	10,0	44,0	5
Metric Short RED*	12	110020509	1,5	5,0	14,0	14,0	5,0	20,0	50
	16	110020510	2,5	7,0	17,0	17,0	5,0	23,0	50
	20	110020511	4,0	10,0	22,0	22,0	6,0	26,0	50
	25	110020512	5,0	13,0	27,0	27,0	7,0	28,0	25
	32	110020513	7,0	17,0	34,0	34,0	8,0	30,0	20
	40	110020514	10,0	22,0	42,0	42,0	8,0	33,0	20
	50	110020515	17,0	29,0	55,0	55,0	9,0	37,0	10
	63	110020516	28,0	40,0	65,0	65,0	10,0	44,0	5

LOCKNUTS LF

	Thread (T)	Part Number	H	E	Packing
Metric	12	120010038	15,0	3,0	50
	16	120010039	20,0	3,0	50
	20	120010040	24,0	3,5	50
	25	120010041	30,0	3,5	25
	32	120010042	35,0	4,5	20
	40	120010043	45,0	4,5	20
	50	120010044	55,0	5,5	10
	63	120010045	70,0	6,0	5

*Reduced sealing / Garniture réductrice

Dimension in millimeters